



## Specifications

Category : **EFP**

Application : **location light for HDTV productions on the field**

AC 300W 220/230V robust and lightweight : a broad and diffused spread of light matching the HD characteristics (16:9 i1080). Focusable and dimmable for maximum flexibility. Fitted with built-in umbrella adapter **SPEED SOFT**.

Supplied fully equipped in Set READY TO GO.

(diffuser, barndoor and lamp included in the price)



- Superior quality aluminium reflector materials 99,99% extra pure.
- Computer aided reflector design & coatings (by proprietary laniro software).
- Robust and durable construction.
- Wide beam apertures. Variable spot-flood.
- Built-in Speed Soft umbrell adapter.
- Universal stand mount 16mm compatible with handle.
- Power cable 3,50 long, section 3x0,75 with in-line dimmer



HDVIDEO KIT

## Photometrics

	DISTANCE 1m		DISTANCE 2m		DISTANCE 3m	
	SPOT	FLOOD	SPOT	FLOOD	SPOT	FLOOD
Øbeam	60	80	1,20	1,70	1,80	2,50
LUX	9860	5000	2640	1320	1190	680

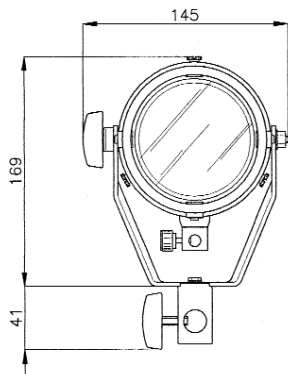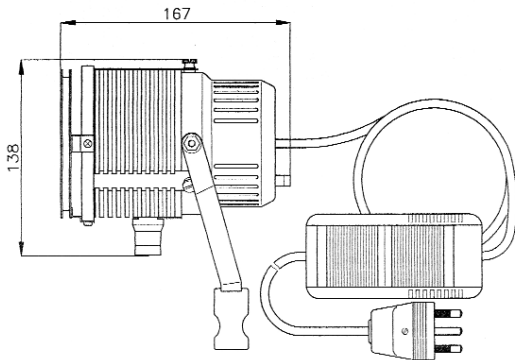

SPEEDSOFT DIFFUSER UMBRELLA WITH ATTACHMENT SPIGOT ON BOARD

