

SOFTLIGHT 1250



code 420

Specifications

Construction: Pressed aluminium.
Black epoxy anti-scratch finish on outside;
High temperature matt white on inside.
Extra-pure aluminum reflector for each lamp; diffusing finish.
Lampholder R7s.
Fitting lamps 625w P2/10, 1000w P2/7 and 1250w P2/12 (3200°k)
Rotating lamp bar with tilt lock for a double use for the luminaire as
a Soft (indirect) or Broad (direct) light source.
Aluminum yoke with 1-1/8" (29 mm.) spigot M.O. and P.O.
Cable lenght 4m. Section 3x1,5 mm2. Titanex HAR H07 RN
Supplied with integral wire guard for each lamp.
Independent switching for each lamp.
Weight M.O. 4,90 kgs. - P.O. 6,7 kgs.




Accessories

Cod. 421: 1,250 gr. Filter holder

Photometrics

DISTANCE 5 m (2500w - P2/10)	HORIZ. AXIS	VERT. AXIS
light center value	237	237
beam angle= beam at 50% peak value	88°	81°
field angle= beam at 10% peak value	140°	137°

Fitting 1 halogen lamp with R7s base.

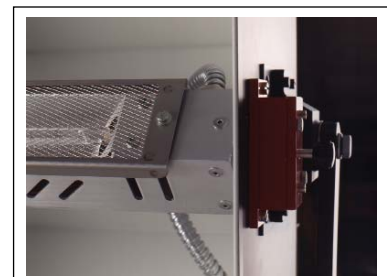

Revolving Bar



Switches panel



Pole operated